

Trademark of Technology and Trust



Product Catalog

NIPPO All products Digest

〈Digest Version〉

Saddled Integral Ferrule Valve, Pipe Hole Cutters,
Locking Cores & Inserters, Accessories

Valves (Globe Valve, Ball Valve, etc.)

Check Valves

Gate Valve

Freeze Tolerant Valve, Drain Valve (Ball Type)

Outdoor Faucet Pillar Series Aquateria

Compact High Speed Air Vent Valves

Stainless Steel Products

Repair Clamps and Repair Bands

Mechanical Joint Fittings

Water Supply System Pressure Reducing Valves

Polyethylene Pipe Fittings

Gunmetal Fittings

NEJ Expansion Joint for PVC Pipe

Flexible Fabric Expansion Joint

HPPE Inserts

Intake and Exhaust Valves

Unit Individualizing Pressure Reducing Valve

Meter Unit, Meter Bypass Unit



Wonderful Creation-For People,For the Future

株式会社 日邦バルブ

Integral Ferrule Valve (Ball)

JWWA-Type A 20•25

Anti-Seismic Snap Tap with Saddles RX



Removing the lock pin allows for rotation on the upper part of the saddle which prevents deformation of the water supply piping.

Type II 13~25



Type L 30~50



Stainless Steel Insulated 20~50

Parallel Externally Threaded Type



Integrated Fittings



JWWA-Type A 13~25



JWWA-KA

JWWA-Type A(F) 25•50



JWWA-KA(F)

Integrated PE Fittings 13~25



JWWA-Type A 30~50



JWWA-KA

For JWWA Polyethylene Pipe 13~25



JWWA-KA-PE

P-Type PE Integrated Fittings 13~25



SBP-P

Type B 13~25



Shallow Buried Type 20~50



For Water Distribution Polyethylene Pipe 20~50

Shallow Bury Type



HP-FSB

Poultic Standard Type



HP-ASB-JW

EF Saddle Poultic Standard Type



SBEFV

EF Saddle Clamp 50•75



Saddled Insert 20~50



Pipe Hole Cutters, Core Inserters, Accessories

Locking Stainless Steel Core 20~50



Locking Contact Copper Core Sleeve 20~50



Locking Copper Core S:
Inner Surface Epoxy
Powder Coated



Locking Copper Core L:
Inner Surface Epoxy
Powder Coated, Shared
Mortar Lining Tube

Rust-Resistant Core 20~50



Resin Core 20~25



S-Type Hole Cutter 13~25



Electric Hole Cutters

Manufactured by Osaki Precision Co., Ltd.



Falcon
20~50



Hawk
20~25



Pegasus
(electric/manual)
20~50

Stainless Locking Core Inserter 20~50



20~25



30~50

Quick Inserter

Locking Core, Inserter 20~50



L2 Inserter 20~50



Handy Inserter 20~25

Anti-Rust Locking Copper Core, Inserter 20~50



L Type Inserter 20~50

Anti-Rust Locking Resin Core and Inserter 20~25



Polyethylene Pipe Handheld Drill PHD 13~50



13~30



40~50

Handy Drill for VP 13~50



13~50

Anti-Corrosion Film



Anti-Leak Type Available

Globe Valve, Ball Valve

Globe Valve **STO**



13~50

Globe Valve (Internally Threaded) **STI**

(Handle Valve A, B)



13~50

Retractable Globe Valve Type B **STEO**




13~50~50F

Fixed Globe Valve Type B **STCO**



13~25

Ball Valve **BSO BSO-H100**

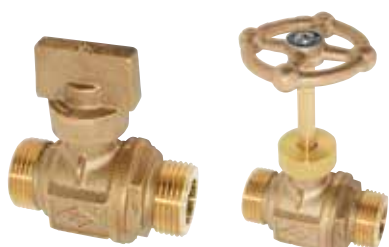

13~50

Long Stem 13~25

Ball Valve (Internally Threaded) **BSI**



13~25~40~50

Retractable Ball Valve **MEO**



13~50~50F

Retractable Ball Valve (Internally Threaded) **MEI**



13~40

Fixed Ball Valve **MCO**



13~25

Angled Retractable Ball Valve



13~25

Ball Valve with Flange



75×30~50

PC Retractable Ball Valve **PC-MEO PC-MEI**



13~50~50F
There are also downstream applications.

With Check Valve



13~25

PCV Check Cartridge

Angle Type PC Retractable Ball Valve **PC-MEO-A**



For Upstream Use
13~25

With Check Valve



For Downstream Use
13~25

Valve Handle



'69



Delta



Two-Sided



Round



Angled



BC Round



Butterfly



Flat



Dragonfly



Jura

Shut Off Valve NT•NNT•RNT•NTC•NT-M•NTK

NT Valve


(Detachable Handle)



NT Retractable Globe Valve B NT-STE 13~25
NT Retractable Ball Valve NT-STE 13~25

NNT Valve


(Detachable Handle, Sealed Plug Type)

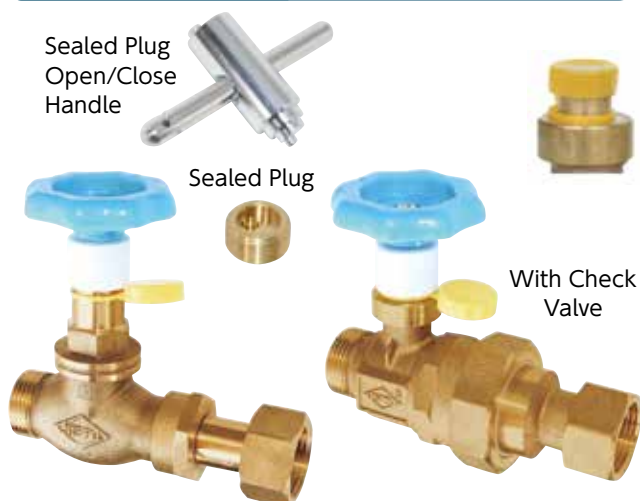

NNT Retractable Globe Valve B NNT-STE 13~25
NNT-PC Retractable Ball Valve NNT-PC-MEO 13~25

RNT Valve

(Replaceable Screw / Idle Type)

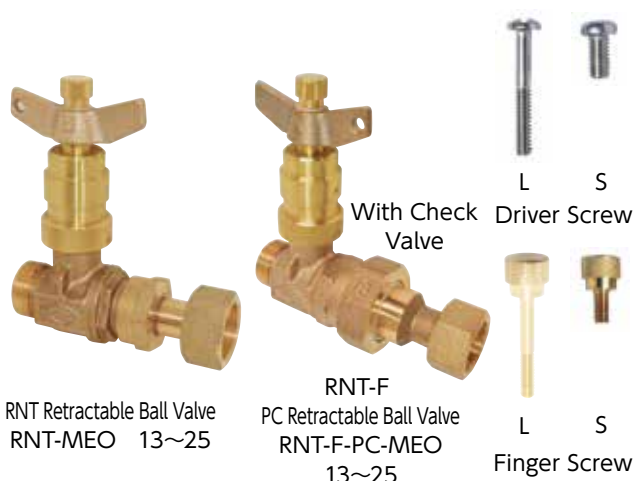


RNT Retractable Ball Valve RNT-MEO 13~25

RNT-F PC Retractable Ball Valve RNT-F-PC-MEO 13~25



NTC Valve

(Replaceable Screw with Connector / Idle Type)

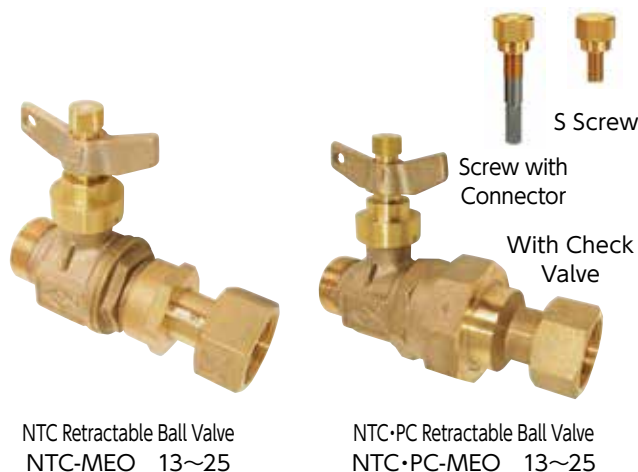


NTC Retractable Ball Valve NTC-MEO 13~25

NTC-PC Retractable Ball Valve NTC-PC-MEO 13~25

NT-M Valve

(Handle is Detachable when Water is Stopped)

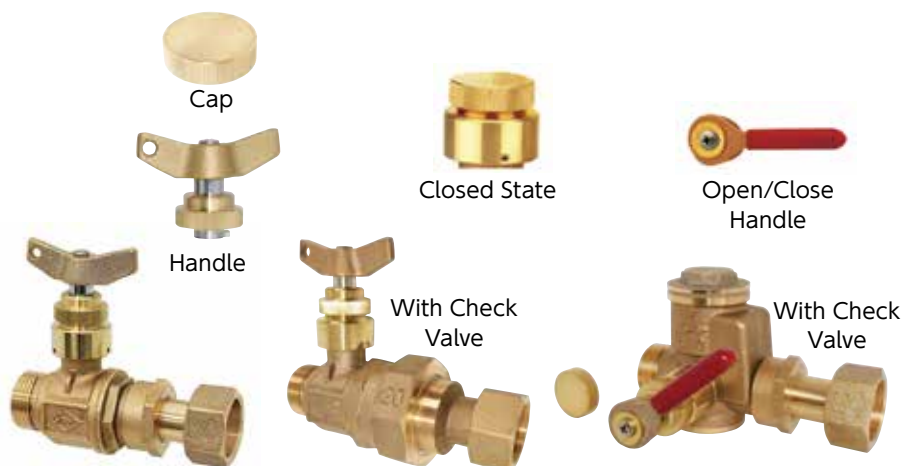


NT-M Retractable Ball Valve NT-M-MEO 13~25

NT-M-PC Retractable Ball Valve NT-M-PC-MEO 13~25

BLC Retractable Ball Valve M2型 BLC-M2 13~25

NTK Valve

(Exclusive key closure type)

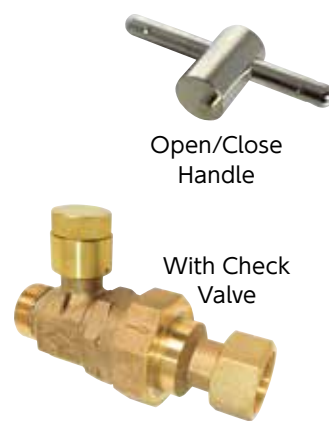

NTK-PC Retractable Ball Valve NTK-PC-MEO 13~25

Double Valve DSE・DSE[2]・DSO



DSE-A
13~25



DSE-B
13~25



DSE-C
13~25



DSE-G
13~25



NNT-DSE-C
13~25・40



DSE[2]-N・L
13~25



DSE-M2
13~25



DSO
13~25

PCR Retractable Ball Valve System C

(with built-in single Check Valve and internal pressure reducing function)



PCR-MEO 13~25



PCR Cartridge

Seal Ring Valve B



SRV-O 13~50



Metropolitan Type Ball Valve (A Valve)

A-SSP



Milimeter Size Screw 20×13・20・25



Top Water
Screw



Milimeter Size Screw 30・40



Top Water
Screw



50

A-VP



Milimeter Size Screw 13~25



Top Water
Screw



Milimeter Size Screw 30・40



Top Water
Screw



50

Pressure Reducing Check Valve



BLH-U 20~50

Single Check Valve PCV-S

PCV-S-CxV
13~50PCV-S-ExI
13~50PCV-S-CxI
13~50PCV-S-CxNEJ
13~25PCV-S-CxP
13~25PCV-S-IxI
13~50PCV-S-OxI
13~50PCV-S-FxI
75

Double Check Valve (with inspection port) PCV-D3

PCV-D3-V
(with inspection port)
25~50PCV-D3-FxEF
75 (with inspection port)

PC Ball Valve (for machinery)



Rc x G 13 x 20



Rc x Rc 13 x 20

PC Ball Valve Type III PC-BIII

PC-BIII-R x G
1/2 x 3/4PC-BIII-Rc x G
1/2 x 3/4 x 3/4 x 1/2PC-BIII-Rc x Rc
1/2 x 3/4

A long handle is also available.

BLC Ball Valve



BLC-SE (Straight, Retractable) 13~50 x 50F

BLC-SE (Left Shut Off)
13~25

BLC, AO-B (Angle) 3~25



CV Check Cartridge



BLC-SE II (Left Shut Off) 13~50 x 50F



BLC Check Valve

CV-SI (Internally Threaded)
13~50CV-SEI (expansion and contraction,
Internally Threaded) 13~50 x 50FCV-SEO (Retractable,
Externally Threaded) 13~25CV-SCO (Fixed,
Externally Threaded) 13~50CV-SCI (Fixed, Internally
Threaded) 13~25

Packing with Check



CPK 13~25



CPK 30~50

Gate Valve Type A, Type B, Soft seal

A Type 30~50

Handle Shape



A-WGIR



A-WGOL

Angled
Clockwise Shut OffAngled
Counterclockwise Shut OffFlat
Clockwise Shut OffFlat
Counterclockwise Shut OffRound
Clockwise Shut Off

A-WGOR



A-WGIR

B Type 13~50



B-WGI



B-WGI



B-WGI Long Stem

Soft Seal 13~50



S-WGIR 13~50



S-WGIR 30~50



S-WGOL 30~50

Freeze Tolerant Valve, Drain Valve (Ball Type) 13~25

CD·CDT-MEO
(CDT with built-in single
Check Valve and drain
function: testable pressure
structure)

BNR



Long Stem



BNE



BNL-O



BNL-I

BNH
13

Outdoor Faucet Column Series




水抜水栓柱
New イマジナ

Water
MarkDrain
Mark

CNH-A

Height=0.6m
0.8m
1.0m
1.2m
1.5m
1.65m
1.8m
2.0m
2.2m

水栓柱 アティア

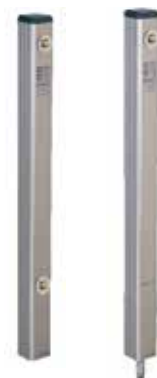VB-H VB-V
VP-H VP-V

Unit: mm

Height	Tap Height	
	VB-VP-H	VB-VP-V
900	400	550
1000	—	700
1200	700	850

Compact High Speed Air Vent Valves NAV-STD

Compact High Speed
Air Vent Valves
NAV-STD Ball Valve
13~25Saddle Band for Air Valve
(For DIP, VP, SP)Air Valve Flange
75Cast Iron Saddle Band for Air Valve
(For water distribution Polyethylene Pipe)Freeze-Resistant
CoverEF Saddle Band for Air Valve
(For water distribution Polyethylene Pipe)


Optional Products



Handle cover for Imagina

•For wall mounting
(50mm)Fixed band
Type D-50•For wall mounting
(50mm to 200mm)Fixed band
Type D-200Imagina
Mounting Elbow
Mounting Elbow
(NPJX integrated)Imagina
Mounting Elbow
Mounting Elbow
(NPJX integrated)Swiveling
Elbow for
Imagina

Stainless Steel Ball Valve 20~50

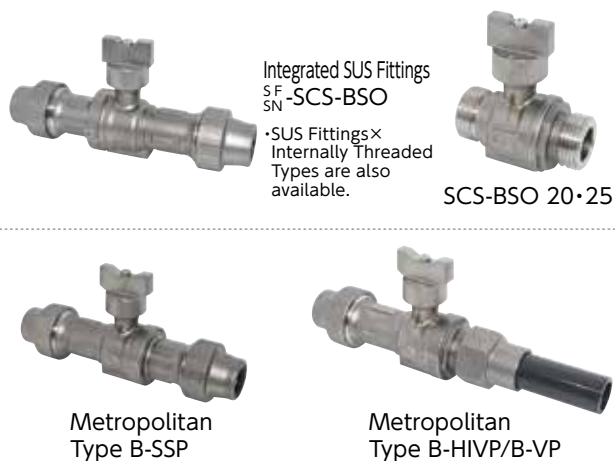

SFJ•SNJ

(Retractable Joint for stainless steel Pipe) 20~50



Corrugated Stainless Steel Pipe



NCSSP-B
20~50

Flexible Fittings

Available in various lengths.



Repair Clamps and Repair Bands

Repair Clamp

Full Cover
SCS (13~50)Type C
(13~50)SS-1
(AP50~150)

SS-2 (200~400)

SS-3 (450~600)

-Available in various widths.
-Also available for Water Distribution Polyethylene Pipe.
-This product is manufactured by Romac Industries, Inc., in the United States, a technical partner, and sold by Nippo Valve after certification by the Quality Certification Center of the Japan Water Works Association.

Repair Band

RB (VP•PE•SP 13~40)
(VP•PE•SP•HPPE 50)

Mechanical Joint Fittings 13~50

No need to thread steel Pipes or disassemble Joint parts.



Socket MJ-S 20~50



Externally Threaded MJ-O



Elbow MJ-L



MJ-M for Meters

For PVC (Parallel Externally Threaded) MJ-V
20•25•40•50Coupling MJ-SS
20~50NSP Dissimilar Pipe Socket
for PE Pipe
MJ-NSP-SNSP Dissimilar Pipe Elbow for PE Pipe
MJ-NSP-LInternally Threaded Tee Type SN*
MJ-TI-SN
25×20•40
50×40•50Socket Type SN*
MJ-S-SN 20~50

*SN Type can pass through the inside of the Pipe.

Water Supply System Pressure Reducing Valves

NRD

(Diaphragm Type)

13~25
Adjustable
Secondary
Pressure
0.2~0.3MPa



NRV

20•25
Adjustable
Secondary
Pressure
0.25~0.4MPa



(YN Type)


30~50
Adjustable
Secondary
Pressure
0.2~0.45MPa




NPJX Polyethylene Double Layer Pipe Metal Fitting for Water Supply (WSA B 011) 13~50



NSP/NSPX Insert Core Integrated Polyethylene Double-layer Pipe Metal Fitting for Water Supply (WSA B 012) 13~50

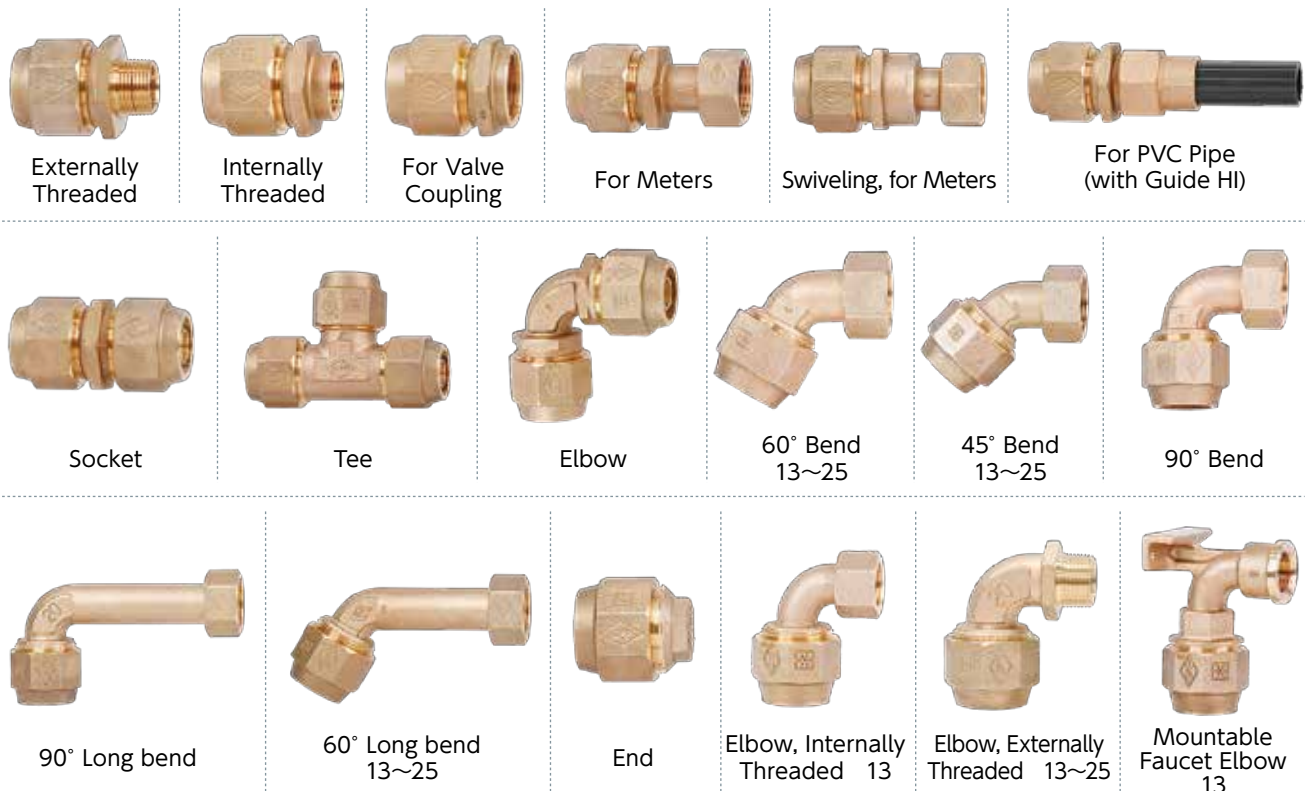


NOJ / NOJX One-touch Fittings Polyethylene Double-layer Pipe Metal Fittings for Water Supply (WSA B 013) 13~50

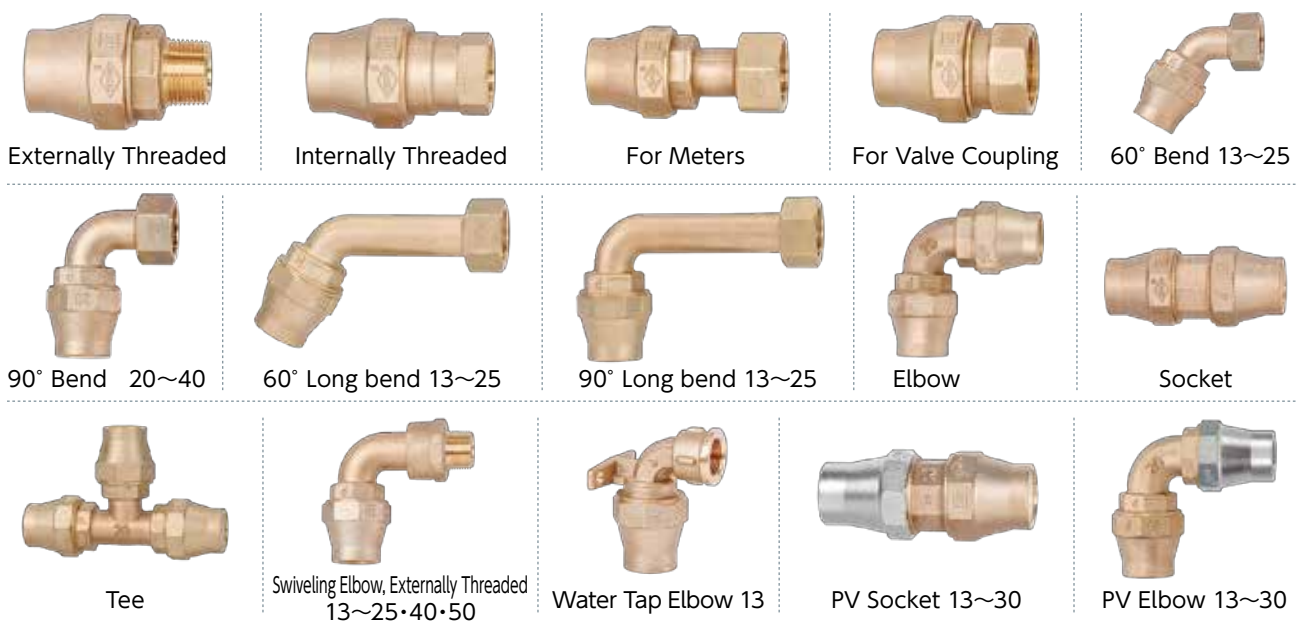

●The implemented special Core offers enhanced earthquake resistance with NOJX and HPPE applications.

Metal Fittings for Water Distribution Polyethylene Pipe 50

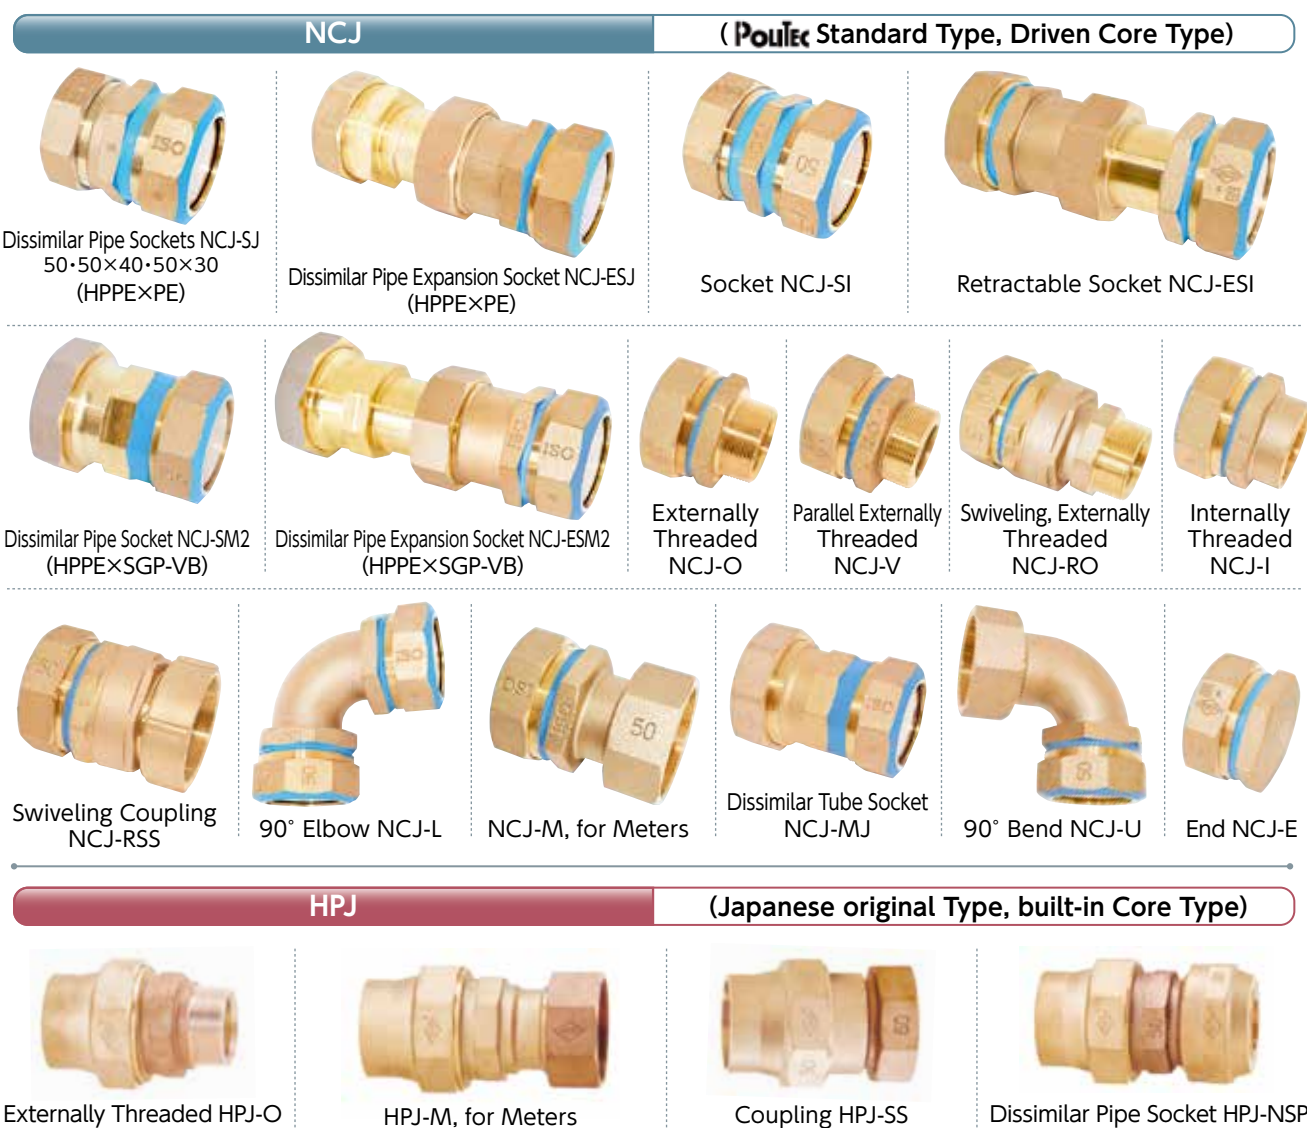

HPPE: Polyethylene Pipe for water supply, PE: Polyethylene Type 1 double-layer Pipe for water supply, SGP-VB: Rigid vinyl chloride lining steel Pipe for water supply B

Gunmetal Fittings



For Retractable
Meter Union Valves
13~50



Retractable Meter union
Internally Threaded
13~50



Retractable Meter union
Externally threaded
13~25, 40



Bushing
20x13.25x13.25x20



Adapter
20x13.25x13.25x20



Meter Retractable Elbow
13~25



Meter Retractable Socket
Internally Threaded 13~40



Meter Retractable Socket
Externally Threaded 13~25, 40



Meter Socket Internally
Threaded 13~40



Meter Socket Externally
Threaded 13~25, 40



Meter Elbow
13~25



Single-Sided Socket
20x13.25x13



SM Union
13~20



Closed Plug Type A
13~25



Closed Plug A
Open/Close Handle



G With Union Guide HI
13~50



G Union Internally
Threaded Guide HI
13~50



Union Nut
13~50



Deep Nut
13~50



Guide Nut
13~50



Cap for saddle
13~50



Meter Union G
13~50



Union Packing
13~50



Seal Washer
13~50



Seal Washer for
Coupling 13~50



Meter Union HI
13~50




Meter Union Guide HI
13~50



Parallel Nipples 13~25



BC Nipple 13~25

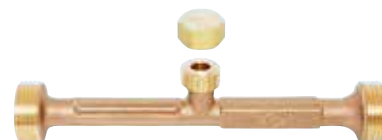

Connecting Pipe 13~30

NEJ Expansion Joint for PVC Pipe 13~50



For Coupling NEJ-S



NEJ-M, for Meters



For Polyethylene Tubes
NEJ-PX



Externally Threaded
NEJ-O



Internally Threaded
NEJ-I



Water
Tap
Elbow

FEJ-^V(for PVC Pipe) ^S(for steel Pipe) Retractable Joint 13~50



For Coupling FE-VS



FE-VM for Meters



Internally
Threaded FE-VI



Externally
Threaded FE-VO



For Coupling FE-SS



FE-SM for Meters

HPPE Inserts




HPPE Inert×For Meters



HPPE Insertion Port×Flange connection (Upstream Flange)



Union Nut×HPPE Insertion Port (Single Insertion)

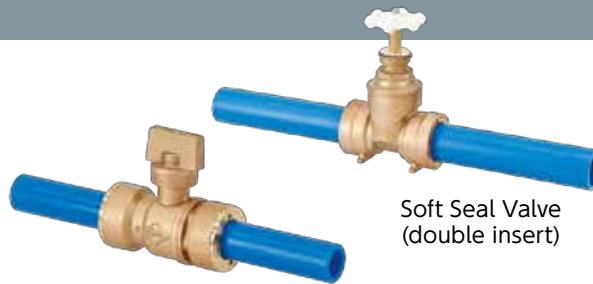

Soft Seal Valve (double insert)

Ball Valve (double insert)

Intake and Exhaust Valve NAV-ODC4

New Products

Features

- There are unique new features for the reduction of clogging.
- The external drainage cover swivels, making it easy to align drainage pipes when installing.
- Air intake performance has been greatly improved.

Function

- Rapid High Volume Intake
- Automatic Air Vent
- Prevention of sudden rise in water level when filling.




There is a video demonstration of the clogging test.


Ideal for piping of Polyethylene Pipes for water supply



(Internally Threaded Ball Valve)

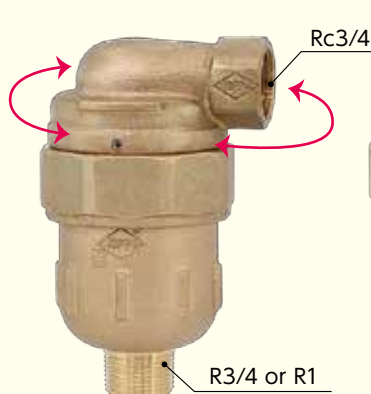

20×25×20

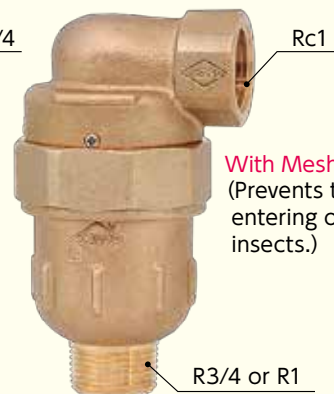


20×25×25

With Mesh Net (Prevents the entering of insects.)

Unit Individualizing Pressure Reducing Valve RVD 20·25

New Products

RVD-U (With Check Valve) 20·25

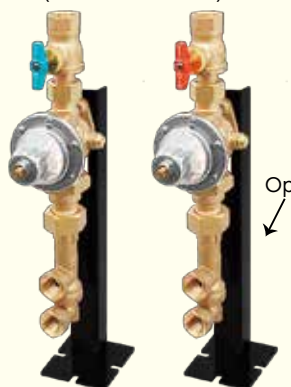

For Water Supply For Hot Water Supply

Options


"For hotel cold and hot water," Pressure Reduction Valve Manifold with Stopcock

RVD-V With Valve 20 · 25



For Water Supply For Hot Water Supply

Branch Piping Unit RVD-U, QJ 20

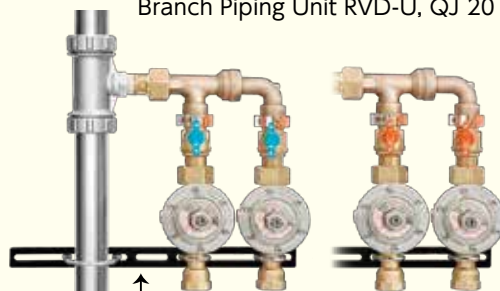


Options For Water Supply For Hot Water Supply

Vertical Tube is not included with the product.

For Pipe Shafts Meter Unit MUP3 13~25

RMUP3 (with Pressure Reducing Valve) 20



SMUP3 20


Pipe washing caps are used to remove foreign matter when cleaning.

Optional Products



Thermal Insulation Cover for Meters

Dedicated Secondary-Side Fitting (part)



SGJ Elbow +PDJ2L



New Products

The meter is not included with the product.

Constant Water Meter Exchange System

Meter Bypass Unit (MBU)

MBU-S 25~75

A reinforced frame is included.
(Meter attachment and removal is by crimping without using gaskets or tools.)



MBU-S With Check Valve 20~50

A reinforced frame is included.
(Meter attachment and removal is by crimping without using gaskets or tools.)



Check Valve Cartridge



New Products

Stainless Steel Lid



Lightweight

MBU-S2 75



-Lid, 2 colors available: Gray, Black
-The Meter is not included.

MBU-S-N 20~50

Available With Check Valve, Reinforcement Frame.
(Meter attachment is done through the tightening of a telescopic component.)



Deep and Cold Resistant Type MBU-H 25~75



-Deep and Cold Resistant Type MBU-N-H25~50 also available.

With emergency water supply function


Meter Bypass Unit EW-MBU 40~75

New Products

EW-MBU-S 40~50



EW-MBU-S 75

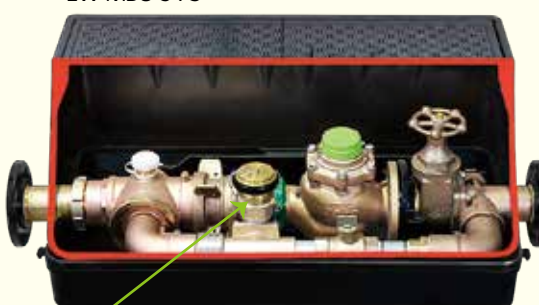

Machino-style coupling

- In addition to the meter uninteruptible water exchange function, emergency water supply is readily available.
- The emergency water supply connection port is a Machino-style coupling that is commonly used in firefighting fittings.
- A readily available emergency water supply can be realized through an installation that is close to a mains water line.



Video examples are provided. ▲

-The Meter is not included with the product.
-There is also a tightening method with the expansion and contraction function of the Meter attachment and removal.


Buried Type for single-structure homes.

Meter Unit MUG

MUG-PK (Commercial Meter Box Storage Type packing/crimping Type) 13~25



MUG-PK-CV

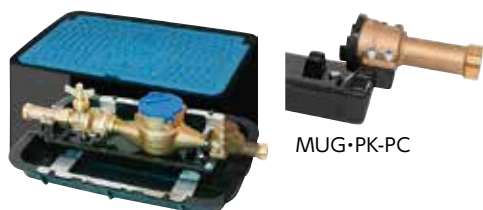

MUG-PK-PC


MUG-PK-F (With Stay, Meter Box Fixed Type) 20~25

-Meter, Meter box is not included.

MUA

Cabinet Type Assembly Board Meter Unit

MUA: Meter crimping union packing method
MUAOR: Meter crimp O-ring method
Diameter: 13•13L•20•25 Vertical Pipe diaMeter: 25•40

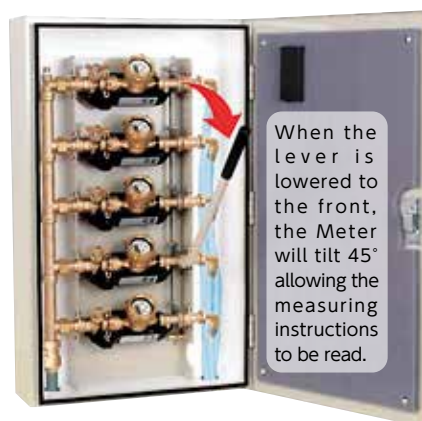

When the lever is lowered to the front, the Meter will tilt 45° allowing the measuring instructions to be read.



- 3 to 6 Meter units can be stored together in the cabinet
- Effective use of site space
- Centralized management of Meters
- Easy Installation
- Easy Maintenance
- The meter can be detached without tools.

-Meters and Fittings are not included with the product.



Wonderful Creation-For People,For the Future



<https://www.nippov.co.jp/>

ISO 9001 and 14001 Certified



Headquarters - Matsumoto Plant:
3046 Sasaga, Matsumoto 399-8750



Hokkaido Plant:
6-120 Kashiwabara,
Tomakomai Hokkaido 059-1362

For inquiries, please contact us at

Sapporo	TEL.011-232-0471
Sendai	TEL.022-213-3177
North Kanto	TEL.0283-22-7547
Tokyo	TEL.03-5338-2231
Kanagawa	TEL.042-741-7121
Matsumoto	TEL.0263-50-5221
Nagoya	TEL.052-735-6511
Osaka	TEL.06-6210-2563
Hiroshima	TEL.082-232-8117
Fukuoka	TEL.092-472-5128



Kamikochi is nestled amongst verdant foliage and enriched by the clear flowing waters of the Azusagawa river. (Kamikochi, Matsumoto City)